



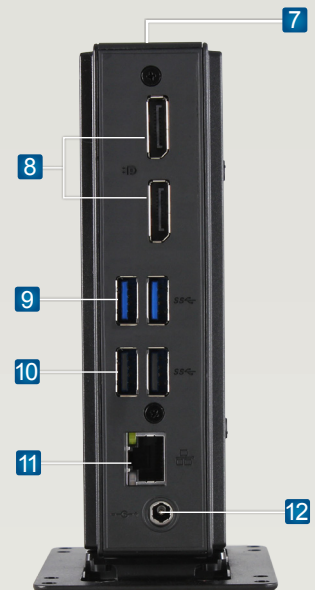

## Thin Client **Atrust t177L**

Atrust t177L is a Linux-based thin client device especially designed for a client/server computing environment. Developed by Atrust, the ACS (Atrust Client Setup) software is also built in to help effective management of t177L. With the support of Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t177L can be used to create virtual and session-based desktop experiences from many remote desktop capable operating systems. t177L offers a rich computing experience where applications look, feel, and behave as local devices, including high-definition multimedia content.

- 1 Power LED**  
Indicates the status of power.
- 2 Power Button**  
Press to turn on/off the client.
- 3 Microphone Port**  
Connects to a microphone.
- 4 Headphone Port**  
Connects to a headphone or a speaker system.
- 5 USB 2.0 Port x 2**  
Connects to a USB device.
- 6 USB 3.2 Gen 1 Type C**  
Connects to a USB device.
- 7 Kensington Lock Slot**  
Connects a Kensington cable to secure the thin client.
- 8 DisplayPort x 2**  
Connects to a monitor.
- 9 USB 3.2 Gen 1 x 2**  
Connects to a USB device.
- 10 USB 2.0 Port x 2**  
Connects to a USB device.
- 11 LAN Port**  
Connects to a host server through a LAN switch.
- 12 DC IN**  
Connects to an AC adaptor.

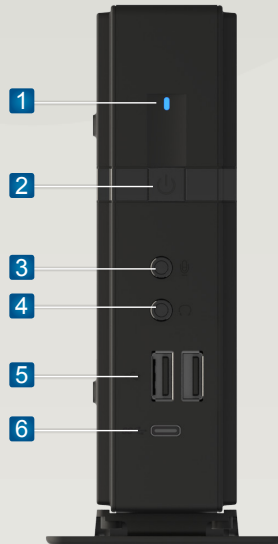

### Atrust t177L Features

- ▼ Dual display support
- ▼ Durable and quiet design
- ▼ Simplified management
- ▼ Slim and robust design
- ▼ Low power consumption
- ▼ Lower total cost of ownership (TCO)
- ▼ Supported Protocols  
t177L supports the following protocols:  
Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™

# Atrust t177L

<b>System</b>	<b>t177L</b>
Processor	Intel® Braswell X5-E8000 1.04G Quad Core(Turbo 2.0G)
<b>Memory</b>	
System memory	2GB(Manufacturing option : 4GB)
Flash memory	8GB(Manufacturing option : 32GB)
<b>Graphics</b>	
Maximum resolution	Up to 2560 x 1600 @60Hz, 3840 x 2160@30Hz
<b>I/O Interfaces</b>	
I/O ports	Front: 2 x USB 2.0, 1 x USB 3.2 Gen 1 Type C, 1 x Microphone port, 1 x Headphone port, Rear: 2 x DisplayPort, 2 x USB 2.0, 2 x USB 3.2 Gen 1, 1 x RJ-45, 1 x DC IN, 1 x Kensington lock slot
<b>Networking</b>	
Ethernet	10M/100M/1000M Ethernet
<b>Dimensions / Weight</b>	
Dimensions	(W) 39.5 x (D) 103 x (H) 143 mm
Weight	448g (approximate)
<b>Environment</b>	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Non-operating temperature	-20°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95% (non-condensing)
<b>AC Adaptor</b>	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+12V DC
<b>Software</b>	
Operating system	Atrust OS
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™(PCoIP/RDP/Blast)
<b>Manufacturing options</b>	WiFi * The dimensions would become (W) 39.5 x (D) 103 x (H) 151 mm if goes with WiFi.

© 2021 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit [www.atrustcorp.com](http://www.atrustcorp.com).